


# TRENTON®

**Corporate Office:**  
 The Trenton Corporation  
 7700 Jackson Rd.  
 Ann Arbor, MI 48103  
 734/424-3600  
 Fax: 734/426-5882

**Houston Div./Export Office:**  
 1880 S. Dairy Ashford Rd.  
 Suite 697  
 Houston, TX 77077  
 281/556-1000  
 Fax: 281/556-1122

## Glas-Wrap

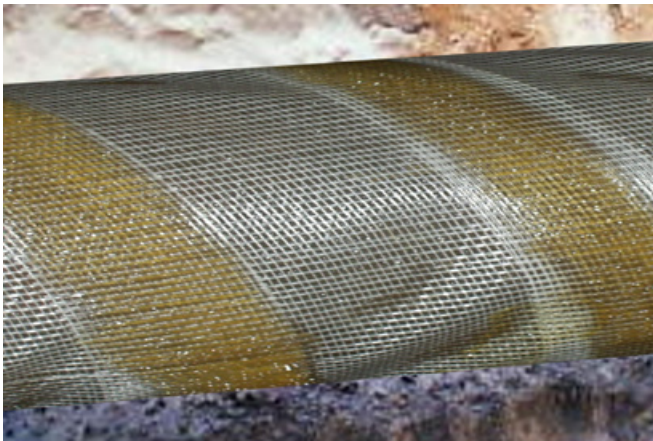

### Description:

Glas-Wrap is a white, resin-coated, woven fiberglass fabric.

### End Use:

Used as an overwrap for Trenton's #1 Wax-Tape for additional protection against backfill and soil stress.

### Application Procedures:

Wearing gloves, apply Glas-Wrap over the #1 Wax-Tape using a 1" overlap, rubbing firmly onto the Wax-Tape.

### Specifications:

Tensile strength..... (per one inch width) 85 lb min.

Thread count per inch:

Wrap threads ..... 20

Fill threads ..... 10

Thickness ..... .005 in.

Color ..... White

### Packaging:

4" x 150' rolls (18 per case)

6" x 150' rolls (12 per case)

12" x 150' rolls (6 per case)

100 sq. yds. per case, 13 lbs per case

### Quantity Requirements:

Pipe Size	Tape Width	Sq. yds./100 ft. (1" overlap)
2"	4"	10
4"	4"	20
6"	4"	29
8"	4"	37
10"	6"	42
12"	6"	49
14"	6"	54
16"	6"	62
18"	6"	69
20"	6"	77
22"	6"	85
24"	6"	92